// Retail Price List & Product Info Guide





WINDOW SHADINGS

Effective February 3, 2020

design simplified

TABLE OF CONTENTS

Product Overview

• Features & Benefits	 2
Collection Information (includes Light Control)	

Pricing Groups

Pricing Group 1 (Standard and Options).	5
Pricing Group 2 (Standard and Options)	6
Motorization Surcharges	. 7

Product Specifications

Features & Options, Cord Loop Drop Chart	8
Mounting Requirements & Finished Dimensions	9
Options and Additional Notes	10-12
Simplicity Rechargeable Motorization: Overview	13
PowerWand Motorization: Overview	14
RemoteLift [™] 2.0 Product Configuration Specifications	15
Standard Shading Operation	16
Retractable Cord and Cordless Shading Operation	17
Product Components – Standard	
Product Components – Retractable Cord	19
Product Components – Cordless Lift	20
Product Components – Simplicity Rechargeable Motorization	21
Product Components – Powerwand [™] Motorization	
Product Components – Remotelift [™] 2.0	23

Oversize Common Carrier Delivery


All orders with any quantity of shades or blinds or any continuous valance 96" or more in width are considered oversize. Therefore, a net shipping charge of \$45 per oversized unit will be assessed.

Oversized orders that require expedited shipping will be quoted and charged accordingly.

Please see General Information for additional freight and shipping charge information.

// Window Shadings

FEATURES & BENEFITS

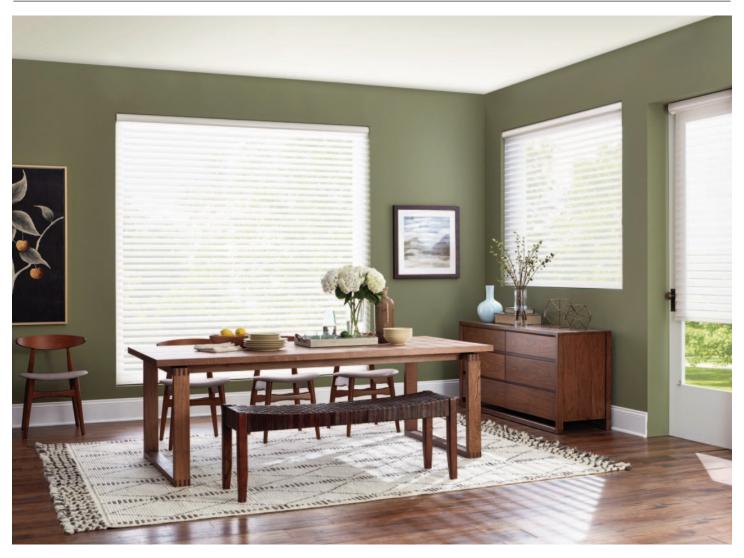

- Three vane sizes complement any window, providing desired view through

 available in 2", 2 1/2" and 3" for decorating flexibility.
- Available in translucent and light-dimming vane styles to provide varying degrees of light control.
- Filters out up to 88% of incoming harmful UV rays when open, and up to 99% when closed.
- Covers large window expanses with no visible internal lift cords to detract from their elegant appearance.
- When raised, they completely disappear into the headrail allowing more outside view.
- Standard cord loop, retractable cord control, cordless lift and battery-operated Simplicity Rechargeable, PowerWand, and RemoteLift 2.0 motorization options for operating convenience.
- Cordless lift, Simplicity Rechargeable, PowerWand, and battery-operated RemoteLift 2.0 motorization shades are certified Best for Kids.
- Fabric-covered headrail option for a soft look top to bottom.
- Limited Lifetime Warranty ensures your customers' satisfaction.

COLLECTION INFORMATION

Family Name	Color Name	Family Code	Color #	Coordinating Hardware Color Number	Coordinating Hardware Color Name	Light Control	Price Group
	Applesauce	N8	226	551	Worn Leather	В	1
	Beige Glow	N8	203	320	Rich Cream	В	1
	Cashmere	N8	206	320	Rich Cream	В	1
	Cityscape	N8	238	426	Squirrel Gray	В	1
	Comfy Khakis	N8	199	180	Dove Gray	В	1
Classic	Dried Basil	N8	065	426	Squirrel Gray	В	1
2-1/2" Translucent	Dusky View	N8	208	320	Rich Cream	В	1
N8	French Bread	N8	222	679	Buff Beige	В	1
	Mariner Blue	N8	224	469	Blue Creek	В	1
	Snow Cap	N8	201	661	White Tiara	В	1
	Sun Dream	N8	202	320	Rich Cream	В	1
	Foam	SL2	700	885	Flex White	В	1
	Mystery	SL2	761	426	Squirrel Gray	В	1
Coastal	Sand	SL2	701	320	Rich Cream	В	1
2" Translucent	Sculpting Clay	SL2	760	180	Dove Gray	В	1
SL2	Seashell	SL2	703	679	Buff Beige	В	1
	Sunrise	SL2	702	320	Rich Cream	B	1
	Foam	SA3	700	885	Flex White	В	1
	Mystery	SA3	761	426	Squirrel Gray	B	1
Coastal	Sand	SA3	701	320	Rich Cream	B	1
3" Translucent		SA3 SA3	760	180		В	1
SA3	Sculpting Clay				Dove Gray		
SAS	Seashell	SA3 SA3	703 702	679 320	Buff Beige	B	1
	Sunrise				Rich Cream		
	Classic Cream	P9	254	350	Vanilla	В	1
_ .	Destiny's Dream	P9	253	661	White Tiara	В	1
Passion	Heather White	P9	250	661	White Tiara	В	1
2-1/2" Translucent	Hint of Spice	P9	255	319	Earthen Beige	В	1
P9	Spiced Vinegar	P9	251	320	Rich Cream	В	1
	Touch of Beige	P9	252	320	Rich Cream	В	1
	Alpine	SR2	300	885	Flex White	С	2
	Antique	SR2	302	329	Summer Linen	С	2
Retreat	Faded Gray	SR2	331	551	Worn Leather	С	2
2" Light Dimming	Nickel	SR2	332	426	Squirrel Gray	С	2
SR2	Sunset	SR2	301	320	Rich Cream	С	2
	Swiss Coffee	SR2	330	656	Golden Straw	С	2
	Alpine	SR3	300	885	Flex White	С	2
	Antique	SR3	302	329	Summer Linen	С	2
	Ash Gray	SR3	351	426	Squirrel Gray	С	2
	Cloud	SR3	309	320	Rich Cream	С	2
Retreat	Coffee Bean	SR3	308	849	Mocha	С	2
3" Light Dimming	Faded Gray	SR3	331	551	Worn Leather	С	2
SR3	Nickel	SR3	332	426	Squirrel Gray	С	2
	Pebble	SR3	311	810	Mushroom	С	2
	Rock Garden	SR3	350	002	Alabaster	C	2
	Stone	SR3	310	656	Golden Straw	c	2
	Sunset	SR3	301	320	Rich Cream	C	2
	Swiss Coffee	SR3	330	656	Golden Straw	C	2
	Aloe Vera	N10	065	451	Lichen	В	1
	Chiffon	N10		320		В	1
			213		Rich Cream	B	
Slub Style	Honey Roast	N10	222	679	Buff Beige		1
Slub Style	Misty Seas	N10	238	426	Squirrel Gray	В	1
2-1/2" Translucent	Seashell	N10	204	320	Rich Cream	В	1
N10	Sugar Cane	N10	201	661	White Tiara	В	1
	Tea Time	N10	220	319	Earthen Beige	В	1
	Willow Herb	N10	226	551	Worn Leather	В	1

* Light Dimming fabrics provide category C, opaque light control because even when the vanes are completely closed they DO NOT completely seal off all incoming light. See vane closure diagram on page 16 for a visual reference. Note: Collections are presented alphabetically. Within each collection colors are also arranged alphabetically



A. Glare Reducing Softly filters light and reduces glare. Images, shapes and people can be seen clearly. Provides the least amount of light and shape screening.



B. Filtering Filters strong light. Images, shapes and people can be seen with some clarity. Provides a modest degree of light and shape screening.



C. Shading Significantly reduces light. Images, shapes and people cannot be seen clearly. Provides a moderate to strong degree of light and shape screening.



D. Blocking Dramatically reduces light.

Images, shapes and people are not distinguishable. Provides privacy against most all direct light and shape screening (except minimal light that may seep through closed or overlapping opaque/blackout vanes).



E. Blackout Blocks out virtually all light (except light that may enter on the sides of the shade) for maximum privacy and darkness.

COLLECTION INFORMATION

Family Name	Color Name	Family Code	Color #	Coordinating Hardware Color Number	Coordinating Hardware Color Name	Light Control	Price Group
	Banana Split	N14	205	350	Vanilla	В	1
	Crème Brulee	N14	203	320	Rich Cream	В	1
Soft Stripe	Ground Ginger	N14	226	551	Worn Leather	В	1
2-1/2" Translucent	Honey Butter	N14	222	679	Buff Beige	В	1
N14	Swan Song	N14	201	661	White Tiara	В	1
	Vanilla Milk Shake	N14	204	320	Rich Cream	В	1
	Citron	M16	205	350	Vanilla	С	2
	Jute	M16	203	679	Buff Beige	С	2
Solitude	Parchment	M16	201	320	Rich Cream	С	2
2-1/2" Light Dimming	Soft Souffle	M16	204	551	Worn Leather	С	2
M16	Sunlit Crème	M16	202	320	Rich Cream	С	2
	Swan White	M16	200	661	White Tiara	С	2
	Applesauce	SS2	607	350	Vanilla	В	1
	Blue Wave	SS2	630	469	Blue Creek	В	1
	City Sidewalk	SS2	631	810	Mushroom	В	1
	Eggnog	SS2	605	320	Rich Cream	В	1
	Glacier	SS2	616	661	White Tiara	В	1
	Lily	SS2	601	885	Flex White	В	1
Sophisticate	Mist	SS2	602	661	White Tiara	В	1
2" Translucent	Moonlight	SS2	603	320	Rich Cream	В	1
SS2	Natural Linen	SS2	619	002	Alabaster	В	1
	Opal	SS2	604	320	Rich Cream	В	1
	Pearl Grey	SS2	617	320	Rich Cream	В	1
	Pencil Sketch	SS2	632	426	Squirrel Gray	В	1
	Praline	SS2	609	350	Vanilla	В	1
	Sandstone	SS2	606	319	Earthen Beige	В	1
	Treasure Map	SS2	633	002	Alabaster	B	1
	Applesauce	SS3	607	350	Vanilla	В	1
	Blue Wave	SS3	630	469	Blue Creek	B	1
	City Sidewalk	SS3	631	810	Mushroom	В	1
	Eggnog	SS3	605	320	Rich Cream	B	1
	Glacier	SS3	616	661	White Tiara	В	1
	Lily	SS3	601	885	Flex White	В	1
Sophisticate	Mist	\$\$2	602	661	White Tiara	B	1
3" Translucent	Moonlight	SS3	603	320	Rich Cream	B	1
SS3	Natural Linen	SS3	619	002	Alabaster	В	1
000	Opal		604	320	Rich Cream	B	1
	Pearl Grey		617	320	Rich Cream	B	1
	Pencil Sketch		632	426	Squirrel Gray	B	1
	Praline		609	350	Vanilla	B	1
	Sandstone	SS3	606	319		B	1
	Treasure Map	SS3 SS3	633	002	Earthen Beige Alabaster	В	1
						C	2
	Castle Stone Coral	N6 N6	226 202	551 320	Worn Leather	C C	2
		-	-		Rich Cream	_	
\/:!!-	Cotton	N6	201	885	Flex White	С	2
Villa	Fawn	N6	203	320	Rich Cream	C	2
2-1/2" Light Dimming	Graphite	N6	238	426	Squirrel Gray	C	2
N6	Island Blue	N6	224	469	Blue Creek	С	2
	Spanish Olive	N6	065	451	Lichen	С	2
	White Sand	N6	213	885	Flex White	С	2

* Light Dimming fabrics provide category C, opaque light control because even when the vanes are completely closed they DO NOT completely seal off all incoming light. See vane closure diagram on page 16 for a visual reference. Note: Collections are presented alphabetically. Within each collection colors are also arranged alphabetically



A. Glare Reducing Softly filters light and reduces glare. Images, shapes and people can be seen clearly. Provides the least amount of light and shape screening.



B. Filtering Filters strong light. Images, shapes and people can be seen with some clarity. Provides a modest degree of light and shape screening.



C. Shading Significantly reduces light. Images, shapes and people cannot be seen clearly. Provides a moderate to strong degree of light and shape screening.



D. Blocking Dramatically reduces light. Images, shapes and people are not distinguishable. Provides privacy against most all direct light and shape screening (except minimal light that may seep through closed or overlapping opaque/blackout vanes).



E. Blackout Blocks out virtually all light (except light that may enter on the sides of the shade) for maximum privacy and darkness.



2" Translucent	
Coastal (SL2)	
Sophisticate (SS2)	

2 1/2" Translucent Classic (N8) Passion (P9) Slub Style (N10) Soft Stripe (N14) <u>3" Translucent</u> Coastal (SA3) Sophisticate (SS3)

24" 30" 36" 42" 48" 54" 60" 66" 72" 76" 84" 90" 96" 102" 109" 120" WIDTH TO: HEIGHT TO: 36" \$562 42" 48" 54" 60" 66" 72" 78" 84" 90" 96" 102" 108" 114" 120"

STANDARD FEATURES

- Headrail Size: 3-1/4" x 3-1/16"
- Snap-in Bracket Style
- · Cord Tilt & Lift

GROUP 1

Color-Coordinated Hardware

OPTIONS: EXTRA CHARGE

- Hardware Color Substitution Surcharge add \$32 per shading
- Retractable Cord Control Surcharge add \$96 per shading
- Motorization.....see page 7

SIZE STANDARDS	Standard Loop	Retractable Cord
Minimum ordered width	12"	12"
Minimum ordered width – tilt only	6"	N/A
Maximum ordered width	120"	120"
Maximum ordered width end mount	48"	48"
Maximum ordered width – tilt only	11-7/8"	N/A
Minimum ordered height	16"	16"
Maximum ordered height – translucent	102" or 120"*	102" or 120"*
* SA3 maximum ordered beight is 102"	•	-

* SA3 maximum ordered height is 102"

TWO-ON-ONE HEADRAIL	Standard Loop	Retractable Cord
Minimum ordered width	24"	24"
Maximum ordered width	144"	144"
Maximum height	120"	120"
Center gap	3/8"	3/8"

Note: Two-On-One Headrail option not available for end mount applications.

Note: Two-On-One Headrail option not available with Cordless Lift, RemoteLift 2.0, PowerWand, or Simplicity Motorization

POWERWAND™ UPGRADE	
Minimum ordered width	21"
Maximum ordered width	120"
Maximum ordered width end mount	48"
Minimum ordered height	12"
Maximum ordered height – Translucent	96"
Maximum Square Feet - Translucent	60

OPTIONS: NO CHARGE – SPECIFY ON ORDER

- Fabric-Covered Headrail
- Tilt Only Shadings 6" to 11-7/8" (standard only)
- Two-On-One Headrail price as 2 separate shades (standard)
- Control Positions (R or L)
- Spacer Blocks
- Extension Brackets
- Hold-Down Brackets
- Back Cover for Inside or End Mounts
- Dust Cover for Outside Mounts

SIZE STANDARDS	Cordless Lift
Minimum ordered width	18"
Maximum ordered width	84"
Maximum ordered width end mount	N/A
Minimum ordered height	16"
Maximum ordered height – Translucent	84"
Note: Two-On-One Headrail option not available with cord	lless lift

Note: End Mount not available with cordless lift

REMOTELIFT 2.0 MOTORIZATION UPGRADE	
Minimum ordered width	12" or 20"**
Maximum ordered width	120"
Maximum ordered width end mount	48"
Minimum ordered height	12"
Maximum ordered height – translucent	102" or 120"*

* SA3 maximum ordered height is 102"

** Satellite Battery Pack or DC Power Supply = 12" min. Battery Wand = 20" min.

SIMPLICITY MOTORIZATION UPGRADE	
Minimum ordered width	21"
Maximum ordered width	120"
Maximum ordered width end mount	48"
Minimum ordered height	12"
Maximum ordered height – Translucent	96"
Maximum Square Feet - Translucent	60



GROUP 2						2" Light Dimming Retreat (SR2)		<u>2 1/2" Light Dimming</u> Solitude (M16) Villa (N6)			<u>3" Light Dimming</u> Retreat (SR3)					
WIDTH TO:	24"	30"	36"	42"	48"	54"	60"	66"	72"	76"	84"	90"	96"	102"	109"	120"
HEIGHT TO:																
36"	\$620	696	776	854	928	1010	1082	1164	1360	1446	1526	1608	1682	1784	2004	2188
42"	652	740	820	906	992	1078	1164	1248	1458	1546	1630	1718	1802	1912	2136	2332
48"	688	776	872	958	1054	1148	1246	1338	1546	1640	1734	1828	1922	2038	2284	2492
54"	718	818	918	1020	1112	1218	1322	1432	1638	1744	1840	1950	2062	2184	2456	2680
60"	750	858	966	1072	1180	1296	1416	1528	1728	1840	1956	2076	2196	2336	2628	2870
66"	784	896	1018	1132	1248	1374	1500	1628	1822	1952	2078	2206	2330	2496	2818	3078
72"	820	942	1064	1184	1318	1458	1586	1718	1922	2062	2196	2330	2460	2642	3024	3300
78"	842	968	1104	1238	1374	1522	1660	1804	2014	2158	2308	2450	2590	2778	3244	3542
84"	878	1018	1148	1296	1450	1596	1752	1896	2122	2276	2426	2720	2842	2954	3480	3798
90"	914	1018	1198	1358	1520	1676	1836	1990	2214	2380	2674	2840	2962	3146	3652	3984
96"	1046	1198	1356	1524	1678	1830	2014	2194	2466	2622	2778	2934	3086	3300	3832	4182
90 102"	1198	1368		1734			2014			2864	3022	3172	3328	3528		
102**	1198	1308	1546	1734	1884	2030	2278	2508	2706	2864	3022	3172	3328	3528	4068	4442
 Headrail 3 Snap-in E Cord Tilt Color-Co 	Bracket S & Lift ordinated	Style	are		_	_		• T • T • C • S • E	wo-On-C ontrol Po pacer Bl xtension	Shadings One Head ositions (ocks Brackets	6" to 11 drail – pri R or L) s		andard oi separate s		standard))
Hardware Cordless Retractat Retractat Motorizat SIZE STANE Minimum orc Maximum or Maximum or Maximum or	Color S Lift Surc ole Cord ole Cord tion	Substitutio charge Control S Two-on- h h – tilt only th th end mou th – tilt only	on Surch Surcharg One Hea	e drail Standa 1 6 12 4 4 11-	add \$ add \$1 add \$1 add \$ rd Loop 2" 2" 8" 20" 8" 7/8"	10 per s 596 per s au Retract	shading shading dd \$192 page 7 able Cord 12" N/A 20" 48" N/A	SIZ Min Ma Ma	ack Cove ust Cove <u>E STAND</u> nimum ord ximum ord ximum ord ximum ord	ARDS ered width lered width lered width lered heigh lered heigh	ide or Er tside Mo n n end mou nt ht – light d	unts nt imming		ordless lift		rdless Li 18" 84" N/A 16" 84"
Cordless Retractab Retractab Motorizat SIZE STANE Minimum orc Minimum orc Maximum or	Color S Lift Surc ole Cord ole Cord tion	Substitutio charge Control S Two-on- h h – tilt only th end mou th – tilt only ht	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1	add \$add \$add \$add \$add \$add \$add \$	110 per s 596 per s au see Retract	shading shading dd \$192 page 7 able Cord 12" V/A 20" 48"	SIZ Min Ma Ma No	ack Cove ust Cove <u>E STAND</u> nimum ord ximum ord ximum ord ximum ord	ARDS ered width lered width lered heigh lered heigh n-One Hea	ide or Er tside Mo n n end mou nt ht – light c ddrail optio	Int	able with d	ordless lif		18" 84" N/A 16"
Cordless Retractab Retractab Motorizat SIZE STANE Minimum orc Minimum orc Maximum or Maximum orc Maximum	Color S Lift Surc De Cord De Cord tion DARDS dered width dered width dered width dered width dered width dered width dered width dered heigh	Substitutio charge Control S Two-on- h h – tilt only th th end mou th – tilt only ht ght – light d	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1	add \$add \$add \$add \$add \$add \$add \$ rd Loop 2" 8" 7/8" 6"	110 per s 596 per s au see Retract	shading shading shading dd \$192 able Cord 12" N/A 20" 48" N/A 16"	SIZ Min Ma Ma No	ze stand zi st cove ze stand nimum ord ximum ord ximum ord ximum ord te: Two-O	ARDS ered width lered width lered heigh lered heigh n-One Hea	ide or Er tside Mo n n end mou nt ht – light c drail optio	Int	able with d	ordless lif		18" 84" N/A 16"
Cordless Retractab Retractab Motorizat SIZE STANE Minimum orc Minimum orc Maximum or Maximum or Maximum or Minimum orc Minimum orc	Color S Lift Surc De Cord De Cord tion DARDS dered width dered width dered width dered width dered width dered width dered width dered heigh	Substitutio charge Control S Two-on- h h – tilt only th th end mou th – tilt only ht ght – light d	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1 10	add \$add \$add \$add \$add \$add \$add \$ rd Loop 2" 8" 7/8" 6"	10 per s 596 per s see Retract	shading shading shading dd \$192 able Cord 12" N/A 20" 48" N/A 16"	• B • D	ze stand zi st cove ze stand nimum ord ximum ord ximum ord ximum ord te: Two-O	ARDS ered width lered width lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh	ide or Er tside Mo n n end mou nt ht – light d adrail optio railable wit	nt imming n not avail h cordless	able with o	ordless lif		18" 84" N/A 16"
Cordless Retractab Retractab Motorizat SIZE STANE Minimum orc Minimum orc Maximum or Maximum orc Maximum orc Maximum orc Maximum orc Maximum orc	Color S Lift Surc De Cord De Cord tion DARDS dered widt dered widt dered widt dered widt dered widt dered heig dered heig	Control S Control S Two-on-	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1 1 1 0 5 tanda	add \$ add \$ add \$ add \$ add \$	10 per s S96 per s S96 per s Retract N 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1	shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02"	SIZ Min Ma Ma Ma No No	ze stand rimum ord ximum ord ximum ord ximum ord ximum ord tximum ord te: Two-Ou te: End Mo	ARDS ered width lered width lered heigh lered heigh n-One Hea pount not av	ide or Er tside Mo n n end mou nt ht – light c adrail optio vailable wit	nt imming n not avail h cordless	able with o	ordless lif	t	18" 84" N/A 16" 84"
Cordless Retractab Retractab Motorizat SIZE STANE Minimum ord Minimum ord Maximum ord Maximum ord Maximum ord Maximum ord Maximum ord TWO-ON-ON	Color S Lift Surc De Cord De Cord tion DARDS dered width dered width dered width dered heigi dered heigi dered heigi dered heigi dered width	Substitution charge Control S Two-on- the substitution the substitution	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1 10 10 5 tanda 2	add \$	10 per s S96 per s S96 per s Retract N 1 1 1 1 1 1 1 1 2	shading shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02" able Cord	SIZ Min Ma Ma No No	ZE STAND himum ord ximum ord ximum ord ximum ord ximum ord tximum ord tximum ord tximum ord ximum ord	ARDS ered width lered width lered heigh lered heigh n-One Hea punt not av r 2.0 MOTO	ide or Er tside Mo n end mou nt ht – light d adrail optio railable wit	nt imming n not avail h cordless	able with o	ordless lif	t	18" 84" N/A 16" 84"
Cordless Retractab Retractab Motorizat SIZE STANE Minimum ord Minimum ord Maximum or Maximum or Maximum ord Maximum	Color S Lift Surc ole Cord ole Cord tion DARDS dered widt dered widt dered widt dered heig dered heig dered heig dered widt dered widt dered widt dered widt	Substitution charge Control S Two-on- the mount of the	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1 10 10 5 tanda 2 14	add \$	10 per s S96 per s S96 per s Retract N 1 2 1 2 1 2 1	shading shading shading dd \$192 page 7 able Cord 12" \/A 20" 48" \/A 16" 02" able Cord 24"	SIZ Min Ma No No RE Min Ma	ze stand zimum ord ximum ord ximum ord ximum ord ximum ord te: End Mo te: End Mo te: End Mo te: End Mo te: End Mo	ARDS ered width lered width lered heigh hone Hea bunt not av r 2.0 MOTT r 2.0 MOTT	ide or Er tside Mo n n end mou ht ht – light c drail optio vailable wit DRIZATIO	nt imming n not avail h cordless	able with o	ordless lif	t	18" 84" N/A 16" 84"
Cordless Retractab Retractab Retractab Motorizat SiZE STANE Minimum orc Maximum or Maximum or Maximum or Maximum or Maximum or Minimum orc Maximum or Maximum or Maximum orc Maximum orc Maximum orc	Color S Lift Surc ole Cord ole Cord tion DARDS dered widt dered widt dered widt dered heig dered heig dered heig dered widt dered widt dered widt dered widt	Substitution charge Control S Two-on- the mount of the	on Surch Surcharg One Hea	arge e drail Standa 1 1 6 12 4 11- 1 1 10 10 5 tanda 2 14 10	add \$add \$	10 per s S96 per s S96 per s Retract N 1 2 1 2 1 2 1 2 1 2 1 1 1 1 1 1 1 1 1	shading shading shading dd \$192 able Cord 12" N/A 20" 48" N/A 02" able Cord 24" 44"	SIZ Min Ma Ma No No RE Min Ma Ma	E STAND himum ord iximum ord	ARDS ered width lered width lered heigh hered heigh hered heigh hered heigh hered heigh hered heigh hered width lered width lered width lered width	ide or Er tside Mo n end mou ht – light c adrail optio vailable wit DRIZATIO	nt imming n not avail h cordless	able with o	ordless lif	t	18" 84" N/A 16" 84" " or 20"** 120"
Cordless Retractab Retractab Retractab Motorizat Size STANE Minimum orc Maximum or	Color S Lift Surcole Cord ole Cord tion DARDS dered width dered width dered width dered width dered width dered heigi dered heigi dered heigi dered width dered width	Substitutio charge Control S Two-on- h h – tilt only th – tilt only ht th – tilt only ht ght – light d SAIL h	Imming	arge e drail Standa 1 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	10 per s S96 per s S96 per s Retract N 1 2 1 2 1 2 1 2 1 2 1 3	shading shading shading dd \$192 able Cord 12" N/A 20" 48" 02" able Cord 24" 44" 02"	SIZ Min Ma Ma No No RE Min Ma Ma Ma	ze STAND nimum ord ximum ord ximum ord ximum ord ximum ord ximum ord te: Two-Oi te: End Ma SMOTELIF1 nimum ord ximum ord ximum ord ximum ord ximum ord	ARDS ered width lered width lered heigh lered heigh lered heigh lered heigh lered heigh lered width lered width lered width lered width lered width lered width	ide or Er tside Mo n end mou nt ht – light c adrail optio railable wit DRIZATIOI	nt imming n not avail h cordless N UPGRAI	able with o	ordless lif	t	18" 84" N/A 16" 84" " or 20"* 120" 48" 12"
Cordless Retractab Retractab Retractab Motorizat SiZE STANE Minimum orc Minimum orc Maximum or Maximum or Maximum orc	Color S Lift Surcole Cord ble Cord ble Cord tion DARDS dered width dered width dered width dered width dered heigi dered heigi dered heigi dered heigi dered width dered w	Substitutio charge Control \$ Two-on-	Imming	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	10 per s S96 per s S96 per s Retract N 1 2 1 2 1 2 1 3 Jlications.	shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02" able Cord 244" 02" 3/8"	SIZ Min Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma	ZE STAND himum ord iximum ord iximo iximum ord iximum ord iximum ord iximum ord ix	ARDS ered width lered width lered width lered heigh hone Hea bount not av F 2.0 MOTT ered width lered width lered width lered width lered width lered width lered width lered width	ide or Er tside Mo h n end mou ht – light d DRIZATIO n end mou ht – light d	nt imming n not avail h cordless N UPGRAI	able with o		t 12	84" N/A 16" 84" " or 20"** 120" 48" 12" 102"
Cordless Retractab Retractab Retractab Motorizat SIZE STANE Minimum orc Maximum orc Maxi	Color S Lift Surcole Cord ble Cord ble Cord tion DARDS dered width dered width dered width dered width dered width dered heigi dered heigi dered heigi dered heigi dered width dered w	Substitutio charge Control S Two-on- h h – tiltonly th – tiltonly th – tiltonly ht ght – light d SAIL h th	Imming	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	10 per s S96 per s S96 per s Retract N 1 2 1 2 1 2 1 3 Jlications.	shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02" able Cord 244" 02" 3/8"	SIZ Min Ma Ma Ma Ma Ma Ma	ZE STAND himum ord iximum ord iximo iximum ord iximum ord iximum ord iximum ord ix	ARDS ered width lered width lered width lered heigh lered heigh lered heigh lered width lered width lered width lered width lered width lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh	ide or Er tside Mo n end mou nt ht – light a adrail optio railable wit DRIZATIOI n end mou nt ht – light d	Int Imming In not avail In cordless IN UPGRAI Int Int Imming Int Supply	able with o		t 12	18" 84" N/A 16" 84" " or 20"** 120" 48" 12" 102"
Cordless Retractab Retractab Retractab Motorizat Size STANE Minimum orc Minimum orc Maximum or Maximum or Maximum orc Maximu	Color S Lift Surco ole Cord ole Cord tion DARDS dered width dered width dered width dered width dered width dered heigi dered heigi dered heigi dered width dered width de	Substitutio charge Control S Two-on- h h – tilt only th – tilt only th – tilt only ht ght – light d RAIL h th drail option y Motorizat	Imming	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	I 0 per s S96 per s see Retract I I I Retract I I I Retract I I I S Retract I I Retract I I I Retract I I I Retract I I I I I I I I I I I I I	shading shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02" able Cord 244" 02" able Cord 24" 44" 02" 3/8"	SII	ZE STAND himum ord iximum ord	ARDS ered width lered width lered width lered heigh lered heigh lered heigh lered width lered width lered width lered width lered width lered heigh lered heigh le	ide or Er tside Mo htside Mo ht - light d adrail optio railable with DRIZATION ht - light d t - light d t - light d	Int Imming In not avail In cordless IN UPGRAI Int Int Imming Int Supply	able with o		t 12	18" 84" N/A 16" 84" " or 20"** 120" 48" 12" 102"
Cordless Retractab Retractab Retractab Motorizat Size STANE Minimum orc Minimum orc Maximum or Maximum or Maximum orc Maximum	e Color S Lift Surc ole Cord ole Cord tion DARDS dered width dered width dered width dered heigi dered heigi dered heigi dered heigi dered heigi dered width dered width dered width dered width one Head one Head one Head dered width dered width	Substitution charge Control S Two-on- h h – tilt only th th end mout th – tilt only th th – tilt only th th – tilt only th th – tilt only th th – tilt only th th frail option drail option srail option trail option	Imming	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	10 per s S96 per s S96 per s Retract N 1 4 N 1 2 1 2 1 2 1 3 Dilications. RemoteL	shading shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02" able Cord 244" 24" 44" 02" able Cord 24" 44" 02" able Cord	SII SII Min Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma	ZE STAND himum ord iximum or	ARDS ered width ered width lered width lered heigh lered heigh lered heigh lered width lered width lered width lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh lered width	ide or Er tside Mo htside Mo ht and tail ht - light d adrail optio railable wit DRIZATION ht - light d ht - light d t t	Int Imming In not avail In cordless IN UPGRAI Int Int Imming Int Supply	able with o		t 12	18" 84" N/A 16" 84" " or 20"** 120" 48" 12" 102" " min.
Cordless Retractab Retractab Retractab Motorizat SiZE STANE Minimum ord Maximum ord Center gap Note: Two-On- PowerWand, o POWERWAN Minimum ord	Color S Lift Surce Cole Cord Cord ble Cord Lift Surce Cord tion Content of the cord Cord tion Content of the cord Lift HEADR dered width dered width dered width dered width cone Head Cone Head Co	Substitutio charge Control \$ Two-on- h h h h h h h h h h h h station frail option frail option gradie frail option frail option frail option frail option frail option	on Surcharg One Hea	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	10 per s S96 per s S96 per s Retract N 1 4 1 4 1 4 1 4 1 4 1 3 1 3 1 3 1 3 1 3 1 3 1 2 1 3 1 3 1 3 1 3 1 3 1 3 1 3 3 3 3 3 3 3 3 3 3 3 <	Shading shading shading dd \$192 page 7 able Cord 12" V/A 20" 48" V/A 16" 02" able Cord 24" 44" 02" ift 2.0,	SIII Mini Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma	E STAND inimum ord iximum or	ARDS erefor Out ered width lered width lered width lered heigh hone Hea bount not av F 2.0 MOTT ered width lered heigh lered	ide or Er tside Mo han end mou ht - light d adrail optio vailable wit DRIZATIO DRIZATIO DRIZATIO ht - light d c or DC Por ATION UPO	nt imming n not avail h cordless N UPGRAI nt mming SRADE	able with o		t 12	18" 84" N/A 16" 84" " or 20"** 120" 48" 12" 102" " min. 21"
Cordless Retractab Retractab Retractab Motorizat SIZE STANE Minimum ord Maximum ord POWERWAI Minimum ord Maximum	Color S Lift Surc De Cord De Cord De Cord dered widt	Substitution charge Control S Two-on- the h - tilt only the the end mout the - tilt only the the end mout the - tilt only the the - tilt only the - til	on Surcharg One Hea	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	10 per s S96 per s S96 per s Retract N 1 2 1 2 1 3 1 3 Dilications. RemoteL 1 2 1	shading shading dd \$192 page 7 able Cord 12" N/A 20" 48" N/A 16" 02" able Cord 24" 44" 02" able Cord 24" 42" 20"	SID SID Mini Ma Ma Ma Ma Ma Ma Ma Ma Ma Ma	E STAND himum ord iximum ord	ARDS ered width lered width lered width lered heigh honone Hea bount not av F 2.0 MOTO ered width lered heigh lered heigh le	ide or Er tside Mo h h end mou ht ht – light d drail optio arailable wit DRIZATIOI ht – light d cr DC Por ATION UPC	nt imming n not avail h cordless N UPGRAI nt mming SRADE	able with o		t 12	18" 84" N/A 16" 84" * ' or 20"* 120" 48" 12" 102" min. 21" 120" 48"
Cordless Retractab Retractab Retractab Motorizat SIZE STANE Minimum ord Maximum ord Center gap Note: Two-On- PowerWand, o POWERWAN Minimum ord Maximum ord	Color S Lift Surcole Cord ble Cord ble Cord tion DARDS dered width dered width dered width dered heigi dered heigi dered heigi dered heigi dered width dered w	Substitution charge Control S Two-on- the h - tilt only the the - tilt only the - tilt	on Surcharg One Hea One Hea unt / limming not availal ion	arge e drail Standa 1 1 2 4 11- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	add \$add \$	I 0 per s S96 per s S96 per s Retract N 1 1 Retract 1 1 S S S RemoteL	shading shading dd \$192 page 7 able Cord 12" 3/A 20" 48" 3/A 16" 02" 20" 44" 02" 24" 44" 02" 3/B" 3/B" 3/B" 21" 20" 21" 20" 48"	 B B C C SIZ Min Ma <li< td=""><td>E STAND inimum ord iximum or</td><td>ARDS ered for Out ARDS ered width lered width lered heigh hered heigh hered heigh hered heigh hered width lered width lered width lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh lered width lered width</td><td>ide or Er tside Mo n end mou nt ht – light c adrail optio railable wit DRIZATIOI n end mou nt ht – light d c or DC Por ATION UP(n n end mou nt</td><td>Int Int Int Int Int Int Int Int Int Int</td><td>able with o</td><td></td><td>t 12</td><td>18" 84" N/A 16" 84" * 100" 48" 120" 48" 120" * min. 21" 120"</td></li<>	E STAND inimum ord iximum or	ARDS ered for Out ARDS ered width lered width lered heigh hered heigh hered heigh hered heigh hered width lered width lered width lered heigh lered heigh lered heigh lered heigh lered heigh lered heigh lered width lered width	ide or Er tside Mo n end mou nt ht – light c adrail optio railable wit DRIZATIOI n end mou nt ht – light d c or DC Por ATION UP(n n end mou nt	Int	able with o		t 12	18" 84" N/A 16" 84" * 100" 48" 120" 48" 120" * min. 21" 120"

// Window Shadings



Motorization consists of a **motor**, **power source**, **and controller**. Be sure all of these elements are included when determining final price.

SIMPLICITY RECHARGEABLE OPTIONS: EXTRA CHARGE – SPECIFY ON ORDER USE APPROPRIATE GRID FOR SHADE PRICE, THEN ADD EXTRA CHARGE(S) BELOW.

Simplicity Rechargeable Motor	add \$398 per motor
- 5 Channel Remote Control (Black Part #CS5138 or White Part #CS5138W)	
- Solar Panel (Part #CS52096 Solar Panel & mounting brackets) (Part #02-70-9021 Mounting bracket screws)	add \$218 each
PowerWand	add \$160 each
Plug-in Charger (Can be used for both Simplicity Rechargeable and PowerWand) (Part #CS5199)	add \$44 each

REMOTELIFT™ MOTORIZATION OPTIONS: EXTRA CHARGE – SPECIFY ON ORDER

Motorization	ac	ld \$640 per shading
Remote Control Wireless Wall Switch	Part #2984495100	add \$78 each
Wireless Wall Switch	Part #2986350100	add \$106 each
Satellite Battery Pack – select with wire length below	Part #KIT2791	
Satellite Battery Pack – with 15" wire	Part #2989899000	add \$90 each
Satellite Battery Pack – with 4' wire	Part #2989900000	add \$100 each
Satellite Battery Pack – with 10' wire	Part #2989901000	add \$116 each
Satellite Battery Pack – with 20' wire	Part #2989902000	add \$130 each
DC Power Supply – select with wire length below	Part #780600000	
DC Power Supply – with 15" wire		add \$136 each
DC Power Supply – with 4' wire	Part #2989900000	add \$136 each
DC Power Supply – with 10' wire	Part #2989901000	add \$142 each
DC Power Supply – with 20' wire	Part #2989902000	add \$148 each
Daisy Chain Adapter – select with wire length below	Part #2989875000	
Daisy Chain Adapter – with 15" cable	Part #2989899000	add \$64 each
Daisy Chain Adapter – with 4' cable	Part #2989900000	add \$74 each
Daisy Chain Adapter – with 10' cable	Part #2989901000	add \$80 each
Daisy Chain Adapter – with 20' cable		

Notes: For surcharges on oversize common carrier delivery, express ship program, shipments to Hawaii, Alaska and Puerto Rico, see General Information Section

MOMENTA APP BRIDGE KIT



REMOTELIFT 2.0 ORDERING NOTES

- Specify Inside (IB), outside (OB) or end (EB) mount.
- Specify if optional back cover is desired with inside (IB) mounts or end (EB) mounts.
- Specify if additional spacer blocks or extension brackets are needed for added clearance.
- Specify left- or right-side motor assembly.
- Specify number of remote control units (at least 1 required per order).
- If ordering satellite battery pack, specify wire length (15", 4', 10' or 20').
- If ordering DC power supply, specify wire length (15", 4', 10' or 20').
- Specify if daisy-chain cables are required to daisy-chain 2 or 3 shadings together (requires DC power supply). If ordering, specify wire length (15", 4', 10' or 20')

PRODUCT SPECIFICATIONS

FEATURES	
# of fabric styles	12
# of Colors	105
Headrail size	3-1/4" X 3-1/16"
Bracket style	Snap-in
Cord loop tilt and lift	Yes, Standard
Raise, lower and tilt with one cord	Yes
Safety cord tensioner	Color Coordinated
Warranty	Lifetime Limited

OPTIONS - EXTRA CHARGE	
Fabric Covered Headrail	Yes
Hardware Color Substitution	Yes
Retractable Cord Control*	Yes
Cordless Lift Not available as Two-on-One headrail	Yes
PowerWand Motorization Not available as Two-on-One headrail	Yes
Simplicity Motorization Not available as Two-on-One headrail	Yes
RemoteLift 2.0 Motorization Not available as Two-on-One headrail	Yes
OPTIONS - NO CHARGE	
Tilt Only (available on standard loop control only)	Yes
Two-On-One Headrail Option Not available with Cordless Lift, PowerWand, Simplicity Mot	Yes orization or RemoteLift
Control positions	Right or Left
Control Positions - PowerWand	Right or Left
Wand Color - PowerWand	White or Black
Wand Length - PowerWand	1 ft, 2 ft, 3ft, 4 ft, 5 ft
Spacer blocks	Yes
Extension brackets	Yes
Hold-down brackets	Yes
Back cover (Inside or End Mounts)	Yes
Dust cover (Outside Mounts)	Yes
Cord length (See Cord Loop Drop Chart)	Yes
Specialty shapes	No
Tile cut-out	No

CORD LOOP DROP CHART

SHADING HEIGHT	CORD LOOP DROP
16" to 26-7/8"	1 ft. (white-only)
27" to 39-7/8"	2 ft.
40" to 59-7/8"	3 ft.
60" to 83-7/8"	4 ft.
84" to 107-7/8"	5 ft.
108" to 120"	6 ft. (white-only)

OPTIONAL CORD DROPS (White Cord Only)				
CORD DROP INCREMENTS				
6'-12'	6" increments			
12'-16'	12" increments			

Note: 18" white only cords available upon request

* Retractable cord length will be 40% of shading height.

MOUNTING REQUIREMENTS

INSIDE MOUNT				
Standard, Cordless, Retractable Cord, Simplicity Motorization, & PowerWand				
Minimum casement depth*	1"			
Minimum casement depth*, fully recessed	3-3/8"			
Minimum rear fabric clearance	1/8"			

OUTSIDE MOUNT				
Standard, Cordless, Retractable Cord, Simplicity Motorization, & PowerWand				
Minimum mounting surface height	1"			
Recommended width overlap per side	3"			
Minimum rear fabric clearance	1/8"			

END MOUNT			
Standard, Retractable Cord, Simplicity Motorization & PowerWand			
Minimum mounting surface depth*	1-1/4"		

 * Add 1/4" to minimum depth dimensions if optional back cover is used for inside or end mounts.

INSIDE MOUNT - REMOTELIFT 2.0	Battery Wand	Sat. Bat. Pack
Minimum casement depth*	2"	1-1/4"
Minimum casement depth*, fully recessed	4"	3-1/2"
Minimum rear fabric clearance	1/8"	1/8"

OUTSIDE MOUNT - REMOTELIFT 2.0	Battery Wand **	Sat. Bat. Pack
Minimum mounting surface height	1"	1"
Recommended width overlap per side	3"	3"
Minimum rear fabric clearance	1/8"	1/8"

END MOUNT - REMOTELIFT 2.0 Battery Wand Sat. Bat. Pack Minimum mounting surface depth* 2-1/8" 1-1/2"

For inside and end mounts an optional back cover and back cover bracket may be ordered. The back cover bracket attaches to the installation brackets.

** Requires 3/4" spacers per installation bracket (included), due to the added clearance required for the battery wand.

FINISHED DIMENSIONS

Dimensions apply to standard loop control,	cordless lift, retractable cord and motorization			
NOTE: WIDTH AND HEIGHT MAY VARY ± 1/8"				
INSIDE MOUNT – Standard Deductions				
Headrail unit	1/8" less than ordered width			
Fabric width	1" less than ordered width			
Fabric width - Cordless Lift	3/4" less than ordered width			
Shading height	1/8" less than ordered height			
OUTSIDE MOUNT – Standard Deductions				
Headrail unit	ordered width			
Fabric width	3/4" less than ordered width			
Fabric width - Cordless Lift	5/8" less than ordered width			
Shading height	1/8" less than ordered height			
END MOUNT – Standard Deductions (not available with Cordless Lift)				
Headrail unit	11/16" less than ordered width			
Fabric width	1-1/2" less than ordered width			
Shading height	1/8" less than ordered height			
TWO-ON-ONE HEADRAIL (not available with Cordless Lift, RemoteLift 2.0, Simplicity Rechargeable, or PowerWand)				
Fabric width	1 1/4" less than ordered width			
Gap between fabric panels	3/8"			
FABRIC GAP – End Gap to Fabric (Gaps On Each Side)				
Control Side	5/8"			
Idle Side	3/8"			
Both Sides - Cordless Lift	3/8"			

OPTIONS

RETRACTABLE CORD

Raise, lower and tilt shadings with one retractable cord. The cord length remains constant when shading is raised or lowered, making it ideal in homes with children or pets. Cord length will be 40% of the shading height and may be shortened for enhanced child safety.

	 0	7
-		1
1	_	T T
B		_
1		
-		9
-		9
	-	
		9
	-	
-		<u> </u>
-		<u> </u>
		u –
		- ñ
		-V
		. 1
		-
		2
		2
		24
		-
		<u> </u>
	-	

TWO-ON-ONE HEADRAIL

Cover patio doors and other large expanses by placing two independently operated shades side-by-side on the same headrail. Note there will be a 3/8" light gap between the two shades, see minimum/maximum requirements under product specification section.

	a
	A
6	
A	
T	
M	
	TL
17	
	II
	I
	1
	11
Contract of the second s	

CORDLESS LIFT

Raise, lower, and tilt shadings with cordless lift. A great choice for homes with children and pets, the lift, lower, and tilt mechanism are all controlled by the clear plastic handle attached to the bottomrail.

With your thumb on the front of the handle and fingers on the back, gently pull down to lower the shading. The hinged handle elegantly retracts when released. Continue pulling on the handle to lower the shadings and open the vanes.

To close the vanes and raise the shades, gently pull down on the handle (about 1") and release. The vanes will close

and then the shading will retract into the headrail.

TILT ONLY SHADING

Ideal for sidelights or narrow windows.


- Shading cannot be raised, it can only be tilted open or closed.
- Hold down brackets are used to secure the bottomrail.

FABRIC-COVERED HEADRAIL

Features a coordinating fabric wrapped onto the headrail to provide a soft fabric look from top to bottom. (See surcharge on pricing pages)




OPTIONS

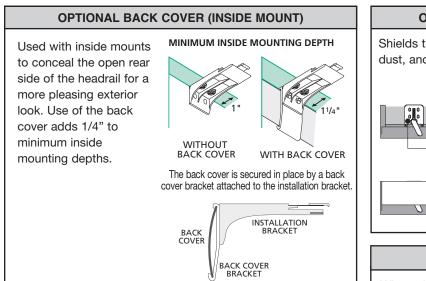

BACK COVER BRACKET

When a back cover is used, attach back cover brackets to the installation brackets before mounting them. Remove the tab from the top of the back cover brackets and both tabs at the rear of the installation brackets.





After mounting the installation brackets, install the back cover.

ADJACENT SHADINGS

To span wide window openings, window shadings may be installed adjacently, so their headrails abut. The gap between the fabric panels of the adjacent shadings varies according to the control placement, as shown in the table below.

CONTROL PLACEMENT		
Adjacent (Abutting)	Window Shadings	
Left/Right Shadings	Center Gap	
Right/Right Controls	3/4"	
Left/Left Controls	3/4"	
Right/Left Controls	1-1/16"	
Left/Right Controls	1/2"	
Window shadings are not recommended for bay windows or butt-and-pass applications.		



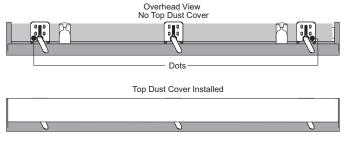

SIDE-BY-SIDE VANE ALIGNMENT

When window shadings are installed side by side, vane alignment can be guaranteed within 1/4" only if:

- Shadings are ordered at the same time and in the identical style, color and height.
- Shadings that need to be aligned are specified on the order form (a note must be included in Special Instructions).
- Shadings exceeding combined width of 120" cannot be guaranteed

Note: Vane alignment cannot be guaranteed for Two-On-One Headrail and motorized shadings <u>combined</u> on the same order.

ADDITIONAL NOTES

SHADING ADJUSTMENT

Shadings should wind evenly and not skew to one side.

A balance weight on the bottomrail can easily be adjusted if the fabric winds unevenly on the roll when the window shading is raised. Uneven winding can cause damage to the edge of the fabric.


- If skewing does occur:
 - Ensure headrail was installed level; shim if necessary.
 - To release, insert a flat blade screwdriver into the weight lock and turn clockwise.
 - Adjust placement of weight in bottomrail, 1" at a time, toward side where fabric is gathering.
 - Secure the weight locks in position by turning them counter clockwise, after making the adjustment.
 - Raise shade, then lower, if necessary, adjust again.



SHADING INSTALLATION

To mount the shading, insert the top of the headrail into the brackets between the locking tab and the bracket flange. Push the headrail into the brackets until the locking tab clicks in place.

To remove the shading, lift the locking tab to release the headrail, rotate the headrail forward, and pull it straight out.

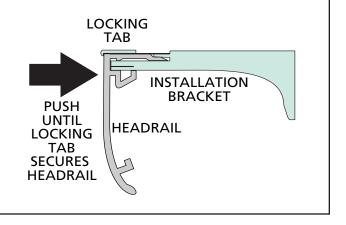

MAGNETIC HOLD-DOWN BRACKETS

Magnetic hold-down brackets secure the bottom of the shading to prevent swaying. Available upon request. Standard on tilt-only shadings.

SIMPLICITY RECHARGEABLE MOTORIZATION: OVERVIEW

Simplicity Rechargeable

- The Rechargeable Simplicity motor program features an integrated rechargeable lithium ion battery in the motor casing and is fully concealed by the inner tube.
- Rechargeable battery is included with the motor. The average battery charge will last 6-12 months based on an average sized shade raised and

lowered once per day. The life of the battery charge will vary based on the type of window covering selected, the size and weight of the window covering and the number of times the shade is operated on a daily basis. The battery can be recharged up to 500 times. It takes approximately 5 hours to recharge the motor when fully depleted.

Battery Charger

• An 8.4 Volt charger requires a standard power outlet to recharge the battery. The charger must be specified when ordering Simplicity Rechargeable Motorized shade option. The charger plugs into the charging port of the motor. The charger is black and comes with a 156" wire. The dimensions are 1" wide x 2-1/2" length x 1-3/4" deep. Sold separately.

Solar Panel Recharge Option


- Plugs in to any Simplicity Rechargeable motorized shading (does not work with PowerWand). Provides
- constant trickle charge to 7.4v Li-ION Rechargeable battery packs. Does not require direct sunlight, but performs best in regular direct sunlight applications. Will prolong the life of the charge of the 7.4v rechargeable battery packs, and in some applications will maintain charge indefinitely.
- · Life of charge is subject to application variables such as size and weight of shade, frequency of use, amount of direct sunlight exposure, etc.

5 Channel Remote

· The remote can operate up to five shadings simultaneously, individually or in groups. Remotes and holders are available in white or black. The remote comes with a holder which can be mounted to a wall for easy storage. The range of the remote is approximately 80 feet.

Please Note:

- Not all motors run at the same rate of speed.
- Simplicity motors have a "Favorites" position setting. To set a "Favorites" position, follow instructions provided in the installation instructions.














POWERWAND MOTORIZATION: OVERVIEW

PowerWand[™] Motorization

 Shadings can be fabricated with the PowerWand Rechargeable Push Button Control option. The PowerWand Rechargeable option is an easy, cord free motorized operation for the budget savvy homeowner. PowerWand Rechargeable uses Simplicity motors and components.

PowerWand Rechargeable Shades Operation

- Press the up or down button on the pendant to raise or lower the shading to your desired position. No programming is required with PowerWand as upper and lower limits are set at the factory. If desired, upper and lower limits can be adjusted in the field.
- Please refer to the installation instructions for instructions on resetting the upper and lower limits and setting a favorites position can be programmed on-site.

PowerWand Appearance

- The PowerWand Rechargeable wand and pendant is attached to the head rail and requires no additional mounting.
- The wand and pendant hangs down the front of the shades from the head rail.
- Pendant is 2-1/2" long.
- The pendant does not need to be mounted to the wall to operate the shade.

PowerWand Options

- · Wand is available in Black or White (there is no default).
- Wand is available in 1 foot increments from 1 to 5 feet (there is no default).
- · Wand is available on the left or right side of shade (there is no default).

PowerWand Battery Life


• The battery life will vary based on the type of window covering selected, the size and weight of the window covering and the number of times you operate the blind on a daily basis.

Battery Charger

 8.4 Volt charger requires a standard power outlet to recharge the battery. The charger must be specified when ordering the PowerWand motorization option. The charger plugs into the charger port on the side of the pendant. The charger is black and comes with a 156" wire. The dimensions are 1" wide x 2-1/2" length x 1-3/4" deep.









Black Shown with Plug-In Charger

REMOTELIFT™ 2.0 PRODUCT CONFIGURATION SPECIFICATIONS

RemoteLift 2.0 combines IR and RF wireless signals to control your window shadings. By using both line-of-sight (infrared technology) and "out-of-sight" (radio frequency technology), your customers achieve more operating flexibility. RemoteLift 2.0 operates one window at a time or a group of windows, even in multiple rooms.

- Quieter, more robust motor for raising, lowering and tilting shadings
- Ideal option for hard-to-reach windows behind furniture, above counters, in high foyers, etc.
- Enhanced safety in homes with children and pets
- State-of-the-art convenience; multiple options allow even further customization of window shadings
- · Battery-powered system is easy to install and requires no additional wiring

REMOTELIFT 2.0 SYSTEM OPTIONS

BATTERY WAND

Battery wands are the standard power source whether inside (IB), outside (OB) or end (EB) mount, if applicable. Battery wands are mounted on the rear of the headrail. The redesigned battery wand will allow for batteries to be changed without removing the window covering from the window.

- 12 AA 1.5V alkaline batteries.
- Battery life exceeds one year, depending on usage.
- Replace batteries when the window covering(s) begin to operate slowly.

SATELLITE BATTERY PACK

The satellite battery pack is an optional power source. The battery pack connects to the same side of the headrail where the receiver eye or satellite eye is located. The satellite battery pack is the best choice when the window covering is mounted in a high window, restricting access to a battery wand.

- 18V satellite battery pack:
 - Available in 15", 4', 10' and 20' wire lengths.
 - 12 AA 1.5V alkaline batteries.
- Battery life is approximately one year, depending on usage.
- Replace batteries when the window covering(s) begin to operate slowly.
- Mounting options: top of headrail, next to molding or under the sill.
- Satellite battery pack cover can be painted.

DC POWER SUPPLY

The DC power supply is an optional power source. The DC power supply plugs into any standard household outlet.

- 18V DC power supply:
 Available in 15", 4', 10' and 20' wire lengths.
- Eliminates need to change batteries.



18V Battery Wand



18V Satellite Battery Pack



18V DC Power Supply

DAISY CHAIN

The optional Daisy Chain Adapter allows up to 3 shades to run off of one DC power supply. You must specify the cable wire length when order is placed.

Note: Keep in mind which side the sensor eye is positioned on each side when determining daisy-chain length.



Daisy-Chain Adapter/Connector



STANDARD SHADING OPERATION

STANDARD SHADING **OPERATION**

Shadings are operated using a continuous cord loop. As shown in the illustration below, from the fully raised position [1] pulling down on the rear half of the cord loop lowers the shading [2, 3]. After it is fully lowered, continuing to pull down on the cord pivots the bottomrail and opens the fabric vanes [4]. When the vanes are fully open [5], limit stops in the headrail prevent further movement in that direction.

With the fabric vanes fully open, pulling down on the front half of the cord loop first closes the vanes [6, 7] and then raises the window shading [8]. Whenit is fully raised [1], limit stops again halt shading movement, preventing the bottomrail from being retracted too far into the headrail.


Light Control

With the shading in the fully lowered position, the continuous cord loop is used to adjust the fabric vanes from open to closed, and anywhere in between. Light control is at your customer's fingertips. (Note: The degree of maximum vane closure varies slightly from the top to the bottom of the shading.)

Vane Opening


Vane opening is the amount of unobstructed visibility between fully open vanes when looking through the shading at eye level. Vane opening for shadings is 1" to 1-1/2" depending on vane size and opacity.

- 2" Light Dimming = 1"
- 2" and 2-1/2" Translucent, 2-1/2" Light Dimming = 1-1/4"
- 3" Translucent and Light Dimming



Vane Closure

When the vanes of a window shading are closed, they overlap each other, blocking the view. However, the vanes do not contact each other along the full length of the shading - they do not form a perfect seal against light leakage. This is most visible toward the bottom of the shading. Vane closure is

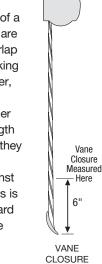

Vane

measured as the distance between the front and rear fabric facings 6" up from the lowest point of the bottomrail, with the shading fully lowered and the vanes closed, as illustrated here. Vane closure for all fabrics is 1".


Note: The degree of maximum vane closure varies slightly from top to bottom of the shading.


• Over-rotation can occur when the shading is completely lowered and vanes are opened. The bottom rail turns up to the inside of the opening when the vanes are in the horizontal position.

Note: Over-rotation is an inherent characteristic of Window Shadings. The amount of over-rotation may vary from shade to shade.

PLEASE NOTE:

- Cord tensioner MUST be mounted to window casement or wall in order for the shade to operate.
- · As with all textiles, Window Shading fabrics are subject to some variations. Slight wrinkles, puckering or bowing is inherent to textile products and should be considered normal, acceptable quality.

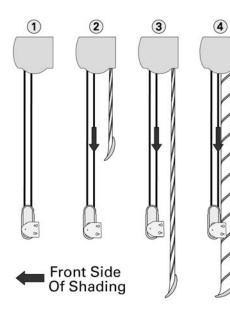

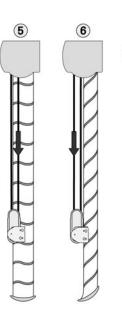





To Lower the Shading

To lower shading and open vanes, pull cord toward the center and down in long even strokes. Note: Allow cord to fully retract between each stroke.

To Close and Raise the Shading

To close vanes and raise shading, pull cord straight down or down and slightly out using long even strokes.


CORDLESS LIFT


Raise, lower, and tilt shadings with cordless lift. A great choice for homes with children and pets, the lift, lower, and tilt mechanism are all controlled by the clear plastic handle attached to the bottomrail.

With your thumb on the front of the handle and fingers on the back, gently pull down to lower the shading. The hinged handle elegantly retracts when released. Continue pulling on the handle to lower the shadings and open the vanes.




To close the vanes and raise the shades, gently pull down on the handle (about 1") and release. The vanes will close and then the shading will retract into the headrail.




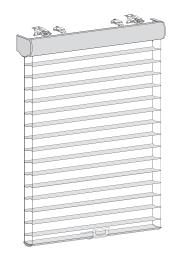


PRODUCT COMPONENTS – STANDARD

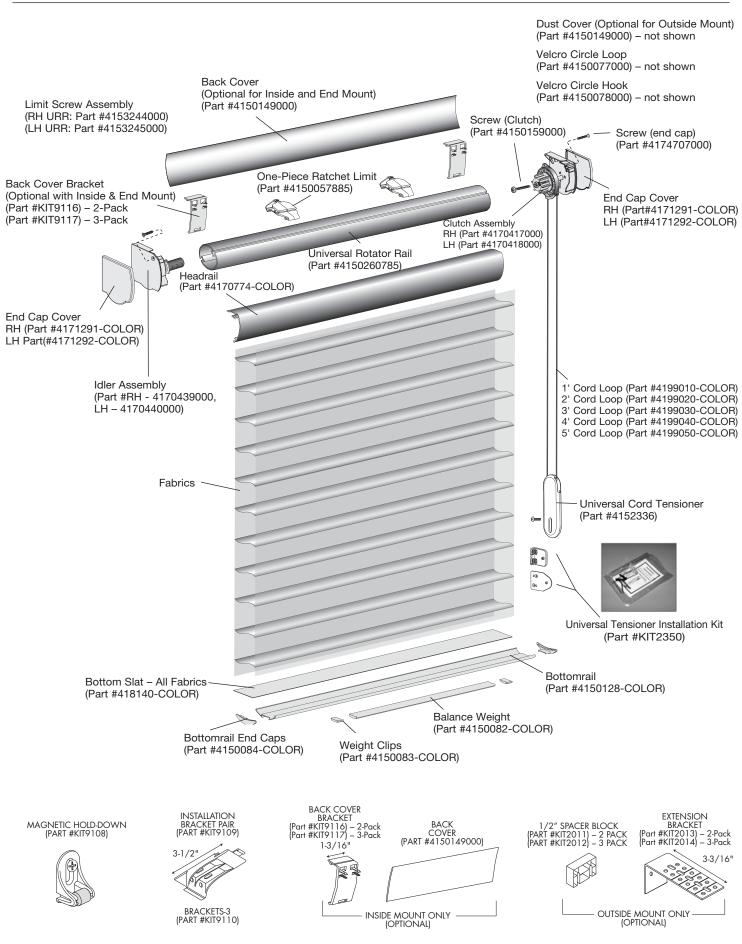


PRODUCT COMPONENTS – RETRACTABLE CORD

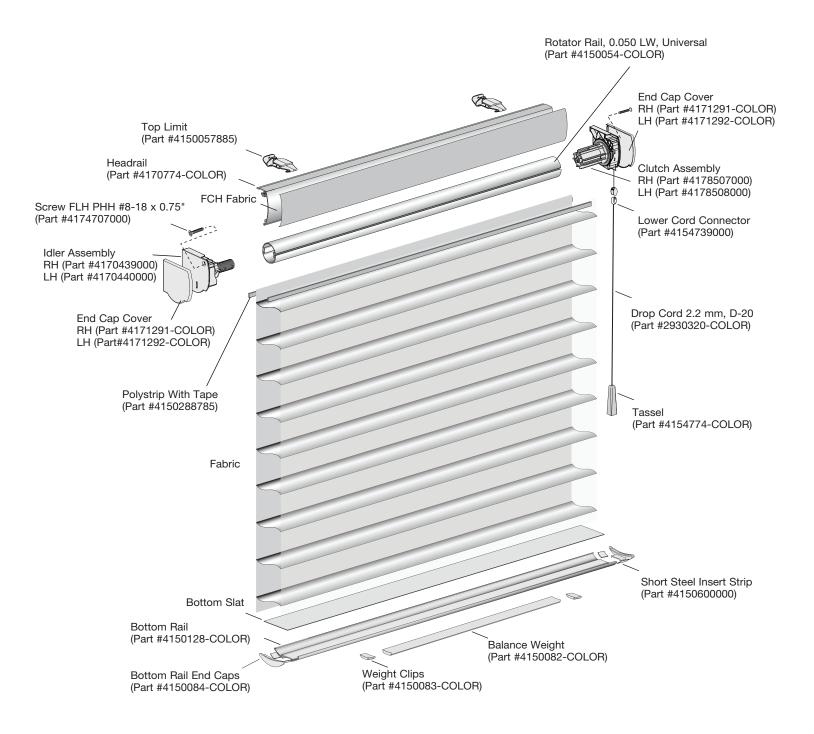


PRODUCT COMPONENTS – CORDLESS LIFT

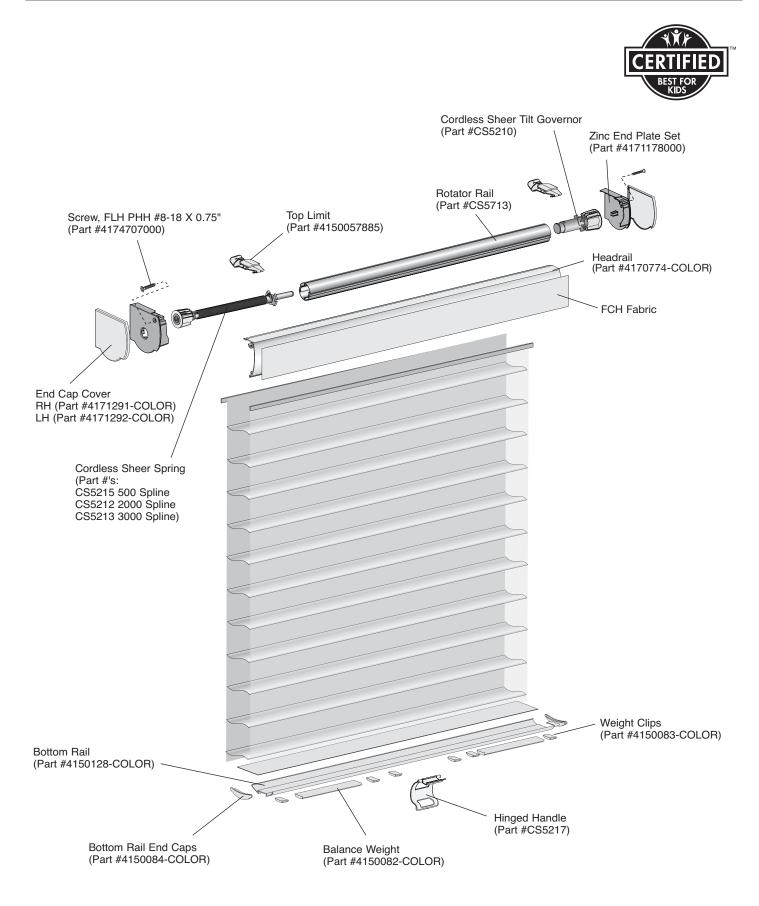


PRODUCT COMPONENTS – SIMPLICITY RECHARGEABLE MOTORIZATION

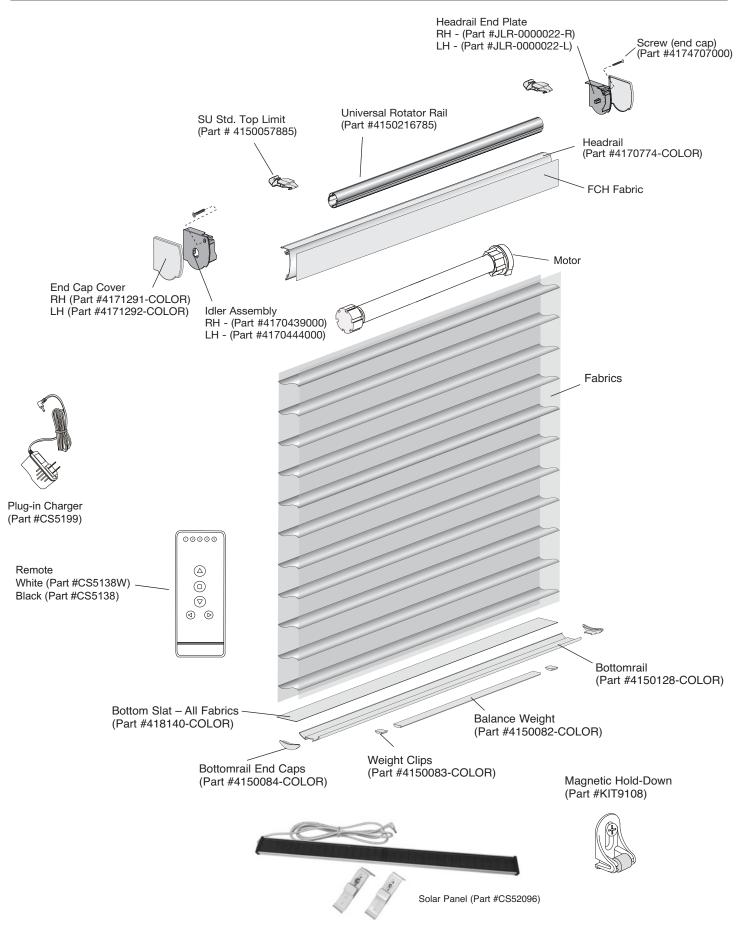

PRODUCT COMPONENTS – POWERWAND MOTORIZATION

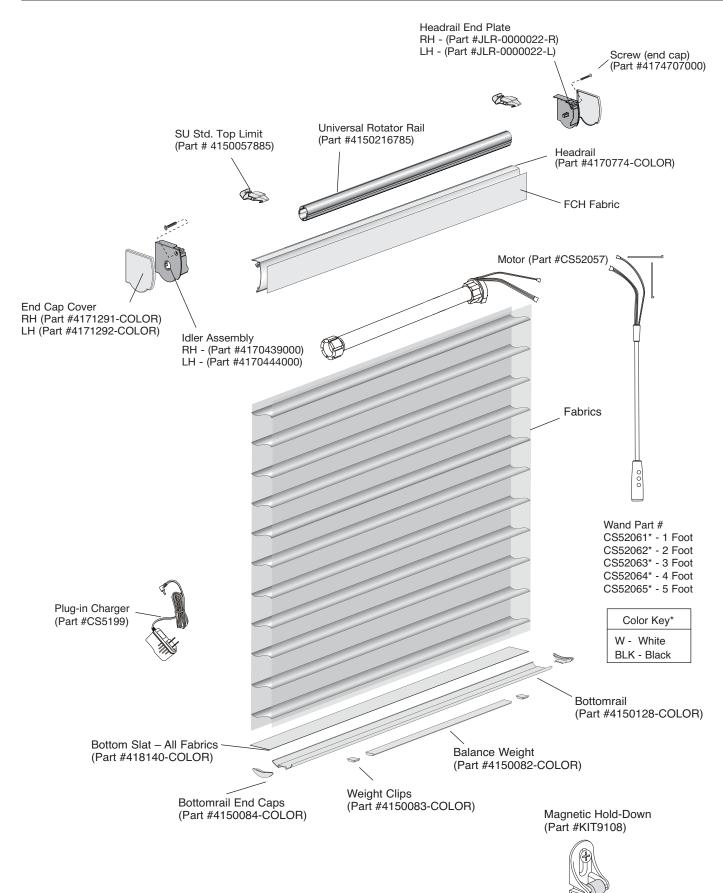

PRODUCT COMPONENTS – REMOTELIFT[™] 2.0

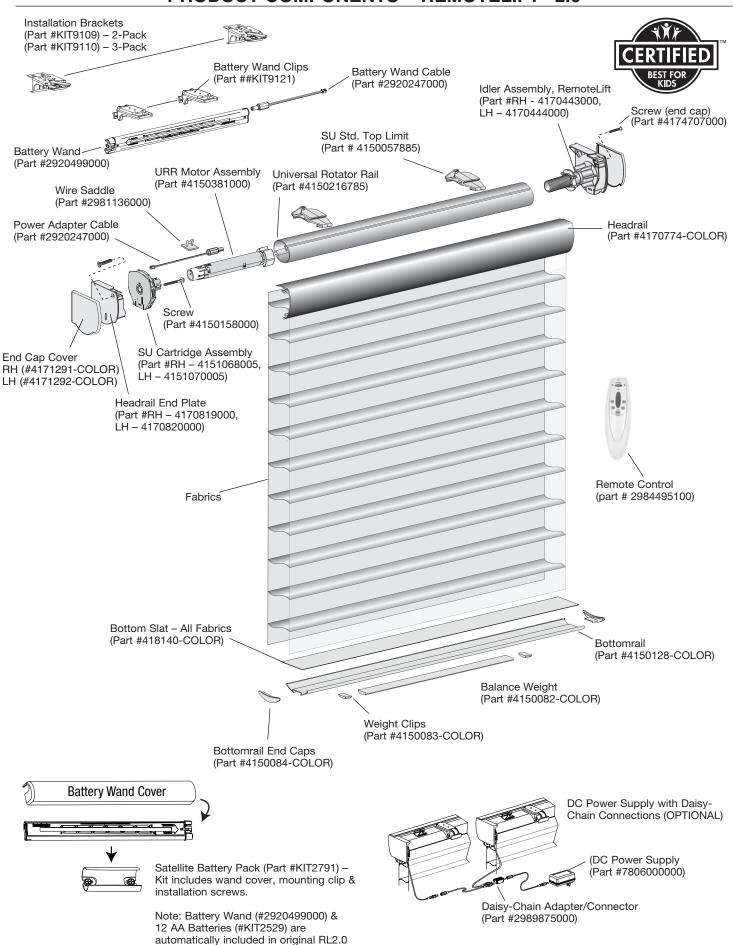

orders, but are also available separately

as parts orders.